



Safes for storage of explosives

Tested by SSF in accordance with the European standard EN-1143-1 and certified by SBSC



Grade III-1500SP



Grade III-1700SP

Description

The Safes are made for outdoor use.

They are fitted with:

- reinforced weather protected roof
- steel lid covering the lock and handle
- lifting eyes welded to the body
- supporting skids for easy handling and transport
- powder extinguisher with protecting cover

The safes have connection devices for thunder protection.

Burglary protection

The safes are tested by SSF in accordance with the European standard EN-1143-1 and certified by SBSC.

Fire protection

The safes 900 and 1500 are tested and classified in accordance with NT Fire 017-60P.

Locking

As standard each safe is provided with one changeable key-lock.

Available as option:

Combination lock or Electronic combination lock.


Weight and measurement

See overleaf


Safe Grade III EN 1143-1

Model	III-900 SP	III-1500SP	III-1700 SP
External measurements mm			
Height	1290	1890	2090
Width	660	660	1020
Depth *	728	728	1628
Internal measurements mm			
Height	900	1500	1700
Width	500	500	860
Depth	400	400	1300
Weight kilos	815	1175	2950
Standard fittings	2 shelves	3 shelves	3 shelves


III-1700 SP is designed for Europe pallet

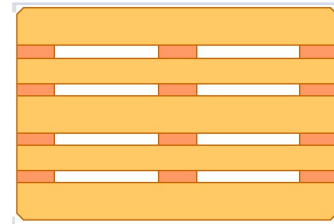

Reinforced weather protected roof

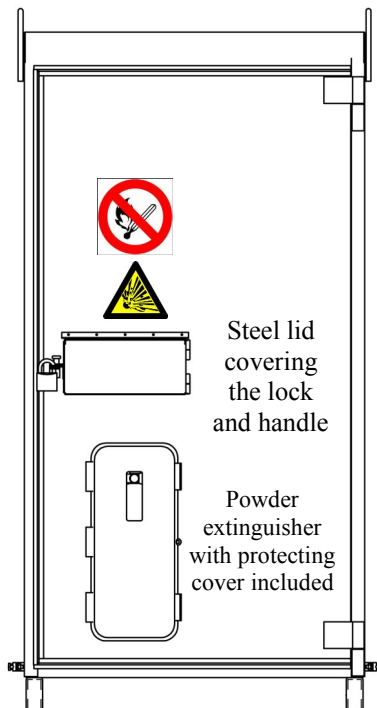

Lifting eyes welded to the body

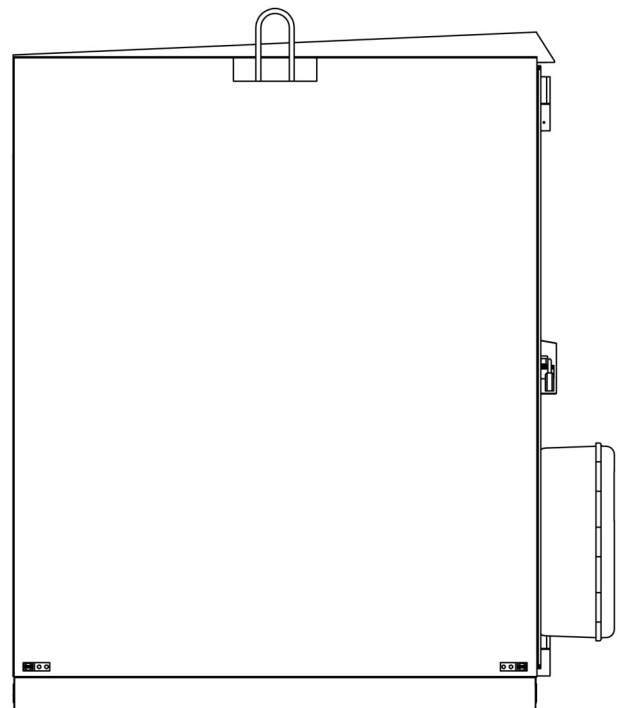

Supporting skids for easy transport

We reserve the right to alter the specification without prior notice.



Head office
Robur Safe AB
 Lundbyvägen 8
 SE-31168 SLÖNGE
 Phone: +46 346 260 260
 Fax: +46 346 260 222

info@robursafe.com

www.robursafe.com