



Night safe Grade IV

As per EN 1143-2

The front is vandal-proof and weather-resistant for outdoor use. Its modern and stylish design makes it blend into urban environments and shopping centres.

Barcode reading is done on the outside for opening the night safe and identifying the customer. An internal reading is done when the deposit is safe inside the night safe.



Front in aluminum finish. The safe is in pearl white, RAL 9010.



Standard equipped with two changeable key locks and a lockable grill gate inside the night safe which prevents access to the deposits after blasting. Electronic combination lock on special order.



Standard equipped with an internal barcode reader and a receipt printer which is used to print out information about the turnover. Several fittings such as external barcode reader, hand reader, RFID reader and GSM modem for are possible.



Prepared for anchoring. (Bolts are not included).



Burglary protection certified by ECB·S according to European standard EN 1143-2.


WEIGHT AND MEASUREMENTS

	IV-500	IV-900	IV-1200	IV-1500
External measurements H * W * D** mm	975 * 690 * 1055	1375 * 690 * 1055	1675 * 690 * 1055	1975 * 690 * 1055
Internal measurements H * W * D mm	430 * 500 * 400	830 * 500 * 400	1130 * 500 * 400	1430 * 500 * 400
Weight kg	1080	1430	1690	1940
Volume liter	86	166	226	286
Deposit opening H * W * D mm	80 * 155 * 265	80 * 155 * 265	80 * 155 * 265	80 * 155 * 265

** External height - The height includes a plinth of 100mm.

* External depth - The wheel (handle) increases the external depth by 55 mm.



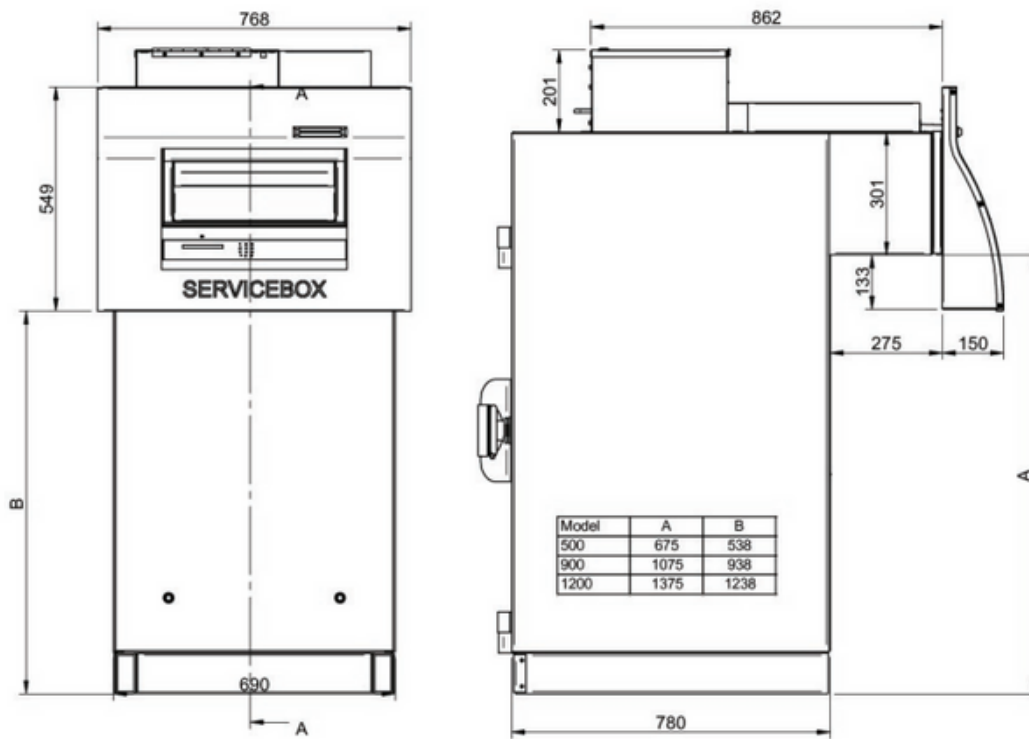

OPTIONAL FITTINGS



Card reader (RFID)
RFID Mifare 13.56Mhz



Electronic combination lock*
Insys combilock 200 simplex



Modem - GSM
for sms receipt function



Hand scanner
for deposit identification

* Other lock options are possible.

We reserve the right to alter the specification without prior notice.



Head office:
Robur Safe AB
Lundbyvägen 8
311 68, Slöinge
Sweden

+ 46 346 260 260
info@robursafe.com
www.robursafe.com