

Robur's grille gate type 950 is used as protection against unauthorized admission daytime, when the strongroom door is in an open position.

The grille gate can be produced in other widths on special order.





Painted in grey, RAL 9006.



Standard fitted with a mechanical lock to be opened with key from the outside and handle from the inside. The grille gate is delivered including door closer and consol. The grille gate can be fitted with an electronic release 24V on special order.




The grille gate frame consists of two square profiles 60 * 60mm.



Left hung grille gate can be fitted to right hung strongrooms door and vice versa.

WEIGHT AND MEASUREMENTS

	Grille gate 950
Height mm	1900
Clear width	950
Total width mm incl. frame profiles	1078
Weight with mechanical lock	43
Weight with electronic release	46

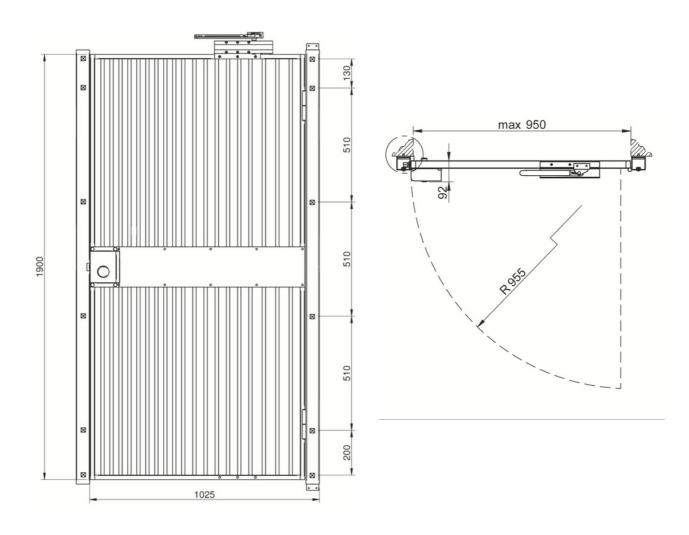

We reserve the right to alter the specification without prior notice.



Head office: Robur Safe AB Lundbyvägen 8 311 68, Slöinge Sweden



L + 46 346 260 260

