

The door can be cast or delivered to a prefabricated vault where for example: weapons, explosives, medicines, jewelry, watches and other valuable are stored. Robur's Grade VIII EX CD door is also used in museums and for archivists.

The door in Grade VIII EX CD have additional certification against diamond drill and explosions.





The vault door in Grade VIII EX CD is primed finish as standard.



Standard equipped with two changeable key locks. Electronic combination locks and/or one extra lock on special order.

On special order, the door can be equipped with special regulations for emergency opening (inside or outside). An emergency opening lock per mounted lock.



Provided as standard with alarm cabling between the door and its frame through one of the hinges and two magnetic switches to indicate open and close position. One door stop holder is delivered with the door as standard.

The door is also prepared for a grille gate as standard.



Burglary protection certified by SBSC and ECB•S according to the European standard EN 1143-1.



Fire protected according to El90.



Blast tested according to the European standard EN 1143-1.




Diamond drills tested according to the European standard EN 1143-1.

## **WEIGHT AND MEASUREMENTS**

	RVD Grade VIII EX CD
Standard clear opening measure	2000 * 900
Max. clear opening dimensions for certified door	2400 * 1400
Max. clear opening dimensions for uncertified door	3200 * 2100
Frame	The frame is designed for 350 mm wall thickness.
Weight kg	1800





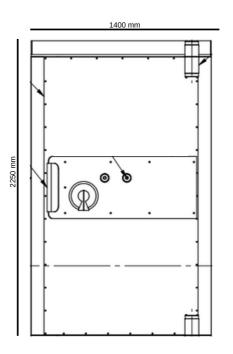

## **HANGING OF DOOR AND GATE:**




fig. 1. Door - right hung Gate - left hung




fig. 2. Door - right hung Gate - right hung




fig. 3. Door - left hung Gate - right hung




fig. 4. Door - left hung Gate - left hung

We reserve the right to alter the specification without prior notice.



**Head office:** Robur Safe AB Lundbyvägen 8 311 68, Slöinge Sweden

**L** + 46 346 260 260

